

Materialeigenschaften Profile



Materialeigenschaften

	max. Länge (cm) <i>max. length (cm)</i>	Gewicht g/lfm <i>weight g/lfm</i>	Farbe <i>color</i>	Material <i>material</i>	biegbar <i>bendable</i> für Flachkeder <i>for SEG frame</i> für Hohlraum <i>for hemstitch</i>
keder					
kederprofil 46/20 <i>keder bead profile 46/20</i>	600	981	eloxiert <i>anodized</i>	Aluminium <i>aluminum</i>	■ □ ■
kederprofil 46/3 <i>keder bead profile 46/3</i>	600	1270	eloxiert <i>anodized</i>	Aluminium <i>aluminum</i>	■ □ ■
kederprofil 28 <i>keder bead profile 28</i>	600	603	eloxiert <i>anodized</i>	Aluminium <i>aluminum</i>	■ □ ■
kederprofil 48/20 <i>keder bead profile 48/20</i>	600	950	eloxiert <i>anodized</i>	Aluminium <i>aluminum</i>	■ □ ■
single					
steckkederprofil 40/18 <i>SEG frame 40/18</i>	600	500	eloxiert <i>anodized</i>	Aluminium <i>aluminum</i>	■ ■ □
steckkederprofil 40/18 45° <i>SEG frame 40/18 45°</i>	600	509	eloxiert <i>anodized</i>	Aluminium <i>aluminum</i>	□ ■ □
steckkederprofil 55/25 <i>SEG frame 55/25</i>	600	1211	eloxiert <i>anodized</i>	Aluminium <i>aluminum</i>	■ ■ □
F-winkel 40/18 <i>F-angle 40/18</i>	600	329	eloxiert <i>anodized</i>	Aluminium <i>aluminum</i>	□ ■ □
double					
steckkederprofil 50/53 <i>SEG frame 50/53</i>	600	1427	eloxiert <i>anodized</i>	Aluminium <i>aluminum</i>	■ ■ □
steckkederprofil 50/53 geschl. <i>SEG frame 50/53 closed</i>	600	1427	eloxiert <i>anodized</i>	Aluminium <i>aluminum</i>	■ ■ □
steckkederprofil 80/42 <i>SEG frame 80/42</i>	600	1332	eloxiert <i>anodized</i>	Aluminium <i>aluminum</i>	■ ■ □
steckkederprofil 80/42 geschl. <i>SEG frame 80/42 closed</i>	600	1337	eloxiert <i>anodized</i>	Aluminium <i>aluminum</i>	■ ■ □
cube					
doppelnutprofil 41/12 <i>double groove profile 41/12</i>	600	459	eloxiert <i>anodized</i>	Aluminium <i>aluminum</i>	□ ■ □
doppelnutprofil 67/12 <i>double groove profile 67/12</i>	600	833	eloxiert <i>anodized</i>	Aluminium <i>aluminum</i>	□ ■ □
doppelnutprofil 105/12 <i>double groove profile 105/12</i>	600	1288	eloxiert <i>anodized</i>	Aluminium <i>aluminum</i>	□ ■ □
specials					
green steckkederprofil 21/16 <i>green SEG frame 21/16</i>	400	860	silbergrau <i>silver gray</i> ¹	recyceltes Hartplastik <i>recycled hard plastic</i>	□ ■ □
profil lightbox <i>profile lightbox</i>	600	366	eloxiert <i>anodized</i>	Aluminium <i>aluminum</i>	□ ■ □
multinutprofil 53/53 <i>multi-groove profile 53/53</i>	600	1729	eloxiert <i>anodized</i>	Aluminium <i>aluminum</i>	□ ■ □
leuchtkastenprofil 100/55 <i>light box profile 100/55</i>	600	2166	eloxiert <i>anodized</i>	Aluminium <i>aluminum</i>	□ ■ □

¹ in silbergrau, schwarz, weiß erhältlich *available in silver-grey, black, white*
Pulverbeschichtung nach RAL für alle Profile möglich. *Powder coating according to RAL possible for all profiles.*

Profile

keder



kederprofil 46/3
keder bead profile 46/3



kederprofil 46/20
keder bead profile 46/20



kederprofil 48/20
keder bead profile 48/20



kederprofil 28
keder bead profile 28

single



steckkederprofil 40/18
SEG frame 40/18



steckkederprofil 40/18 45°
SEG frame 40/18 45°




steckkederprofil 55/25
SEG frame 55/25




F-winkel 40/18
F-angle 40/18


double *




steckkederprofil 50/53
SEG frame 50/53



steckkederprofil 50/53 geschlossen
SEG frame 50/53 closed

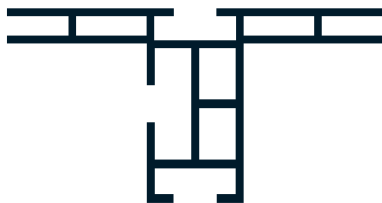

steckkederprofil 80/42
SEG frame 80/42

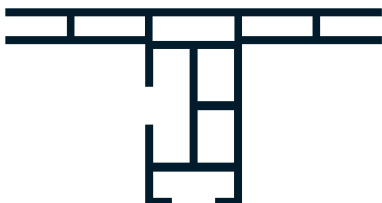

steckkederprofil 80/42 geschlossen
SEG frame 80/42 closed

cube



doppelnutprofil 41/12
double groove 41/12



doppelnutprofil 67/12
double groove 67/12



doppelnutprofil 105/12
double groove 105/12

specials




green steckkederprofil 21/16
green SEG frame 21/16



profil lightbox
profile lightbox



multinutprofil 53/53
multi-groove profile 53/53

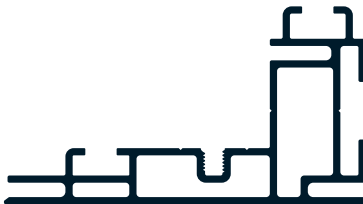

leuchtkastenprofil 100/55
light box profile 100/55

* weitere Profilstärken auf Anfrage additional profile thickness upon request



Procedes Austria
Zellerberg 2
6330 Kufstein

Telefon:
Web:
E-Mail:

+43 (0) 5372 610 86
www.procedes.at
info@procedes.at